waterpoint

PIPELINE LEAK DETECTOR

Using PLD2 in the WPN2 App

Note: WaterPoint PLD2 can be used within the WaterPoint Network (WPN2) app on an iPad or iPhone with iOS 16.
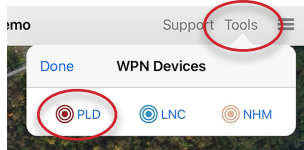
Step 1: Turn on the PLD2
Touch the key chain magnet to the silver target label.
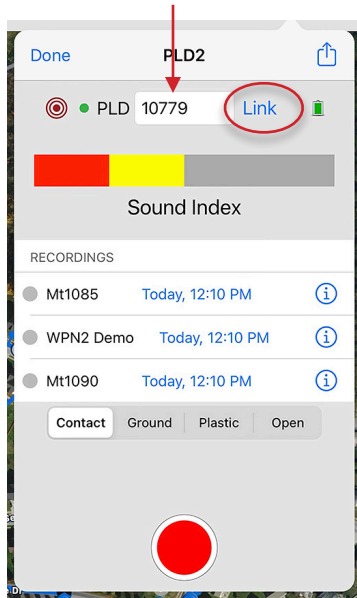
Step 2: Connect to the PLD2

- Login to the Utility in the WaterPoint Network (WPN2) app.

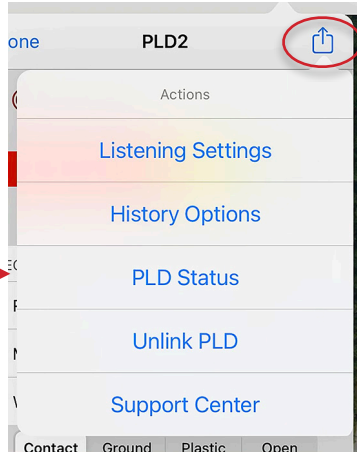- Tap the Tools button in the top right of main view. Then, tap PLD button.

- In the next view, enter the serial number on the PLD2 Sensor label ("PLD1XXXX") and tap Link. After you have successfully linked, the yellow dot next to the red target will turn green.

64seconds

Step 3: Battery Status & Listening Settings

Tap the Actions button in the top right of the view.
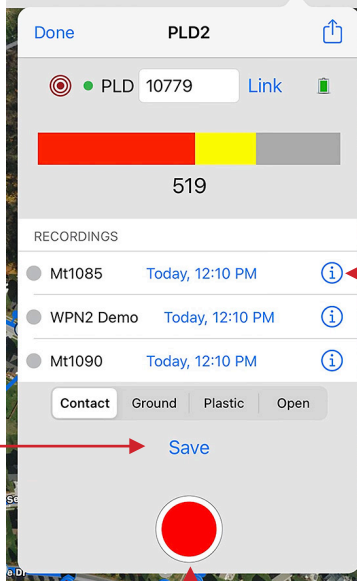
Tap on PLD Status and the battery charge indicator will show green, yellow or red.

Tap Listening Settings to change the PLD2 listening settings including volume, contact surfaces, and special processing filters.

Step 4: Recording

When the recording has stopped, tap Save and the recording will be saved to be reviewed and analyzed.

Tap on the information icon to associate this recording with an asset or work order (if you use WPN2 to manage your utility's assets).

Tap on the record icon to begin recording.

64seconds